


Parking System

Touch'n Go Standalone – MACCESS F1.1 – MACCESS F2

Function Specification

- Support Season Access, Touch'n Go in single controller (GST ready)
- Support MIFARE protocol
- Support transaction image **
- Support event and alarm video recording. Pre-recording 30s and Post-recording 30s **
- Support online and offline working mode Standalone working possible.
- Ready GPIO & TCPIP interface with additional equipment **
- Intelligent indication light and traffic light assists to driver

** Terms & Conditions apply

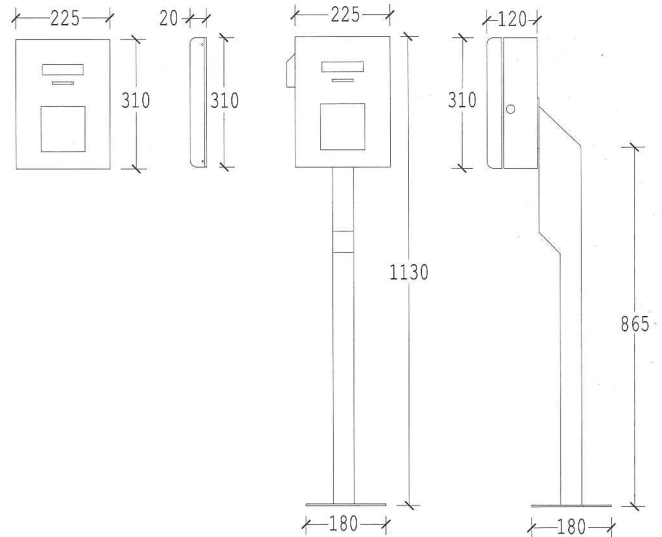

Technical Specification

CPU	ARM926T 400MHz
Memory	64MB, 32 bit Bus
Storage	256MB NAND Flash
Protection	IP53, Weatherproof
Operating Temperature	-30oc ~ +70oc
Operating Voltage	12VDC 1A 12W
Communication	RS232, TCPIP 10/100M
Display	2x16 Characters
Dimension	130mm x 50mm x 170mm



**MACCESS
F1.1**

**MACCESS
F2**